



PRIMARY ARMS®

If you have any questions about the ACSS® reticle, please contact us at:

Email: info@primaryarmsoptics.com


Phone: 713-570-1910

www.primaryarmsoptics.com

 PRIMARY ARMS®

THIS PRODUCT INCLUDES
**THE PATENTED ACSS®
CQB-M5 RETICLE**

FROM PRIMARY ARMS®

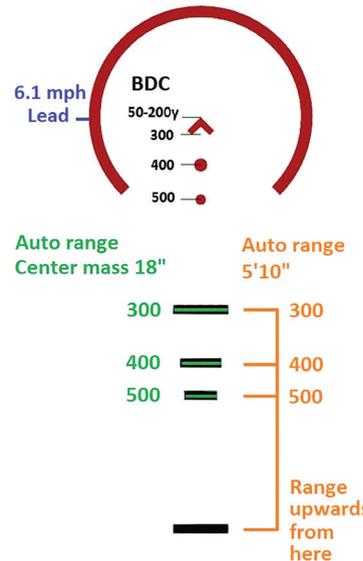

- Exclusive Advanced Combined Sighting System reticle
- Bullet drop compensation and auto ranging in one reticle
- Faster target acquisition
- BDC Compatible with 5.56 NATO, .308 Win, and 5.45x39

The patented ACSSM CQB-M5 reticle combines bullet drop compensation with auto ranging and moving target leads to get you on target fast. A center chevron sits above two bullet drop dots, surrounded by a large horseshoe. Horizontal ranging bars are located below the chevron and horseshoe. Illumination is provided in either red or green, depending on optic model.


Sight in bullet impact to the tip of the chevron at the range indicated for your caliber. Some calibers use a battle sight zero. For example, if using 5.56 NATO, sight in at 50 yards. Bullet impact will be about an inch high at 100 yards before the bullet falls back down to the tip of the chevron again at 200 yards. Place the target level with the bottom of the chevron for 300 yards, and use the two dots underneath to engage at 400 and 500 yards. At close range, simply place the large horseshoe on target as quickly as possible for a fast sight picture.

The outer edge of the large horseshoe serves as a lead indicator for targets moving at approximately 6.1 mph. If the target is moving left to right, use the left edge of the horseshoe. If the target is moving right to left, use the right edge. This technique is best used for targets 100 to 300 yards away.

Shown in Green Illumination



Shown in Red Illumination (Detail)

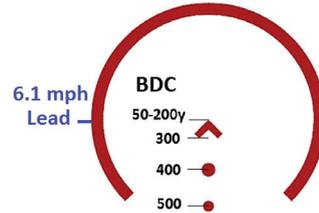

Auto range
Center mass 18"

300
400
500

Auto range
5'10"

300
400
500

Range
upwards
from
here

The ranging bars underneath the chevron and horseshoe are not aiming points and are not illuminated. Use them to quickly find the range to your target, so you can determine which aiming point to use. They are calibrated for a target approximately 5'10" tall and 18" wide. To range vertically, line up the bottom of the target with the fourth ranging bar, then observe which bar is closest to the target's top. The three top bars denote distances of 300, 400, and 500 yards. The chevron's width will auto range a 6" diameter target at 300 yards. The first BDC dot will auto range a 6" diameter target at 400 yards, and the second dot will auto range a 6" diameter target at 500 yards.

Compatible Calibers

